




Tactile Ground Surface Indicator (Discrete)

Range.	Warning Composite Discrete TGSi Stainless Steel with Carb Infill
Group.	Warning Composite Discrete TGSi
Material.	316 Marine Grade Stainless Steel with Carborundum Infill
Substrates.	Timber, Concrete, Tiles, Vinyl, Rubber, Carpet
AS Standards.	Manufactured to AS/NZS 1428.4 .1 2009

Slip Resistance Testing

Test.	Test in accordance with AS/NZS 4586
Type.	Wet Pendulum Test.
Results	P5 = >44 : "In-Line with R12/C ref SA HB 198:2014"
Report By	Sliptest Australia Pty Ltd - NATA Accredited

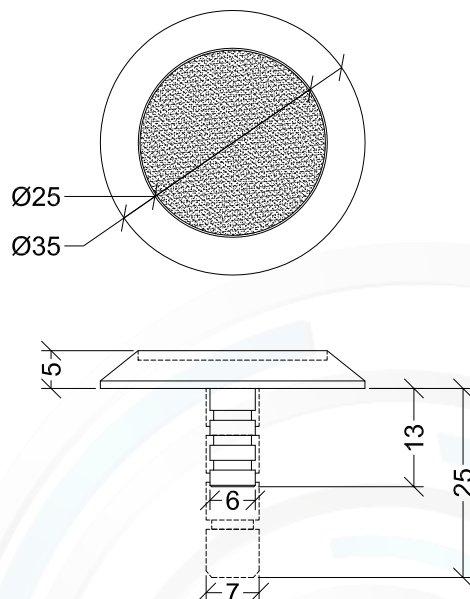

Colours & Codes:



Colours.	13mm.	25mm.	Flat.
Black.	WDSC-13S-TSA-BLK	WDSC-25S-TSA-BLK	WDSC-FB-TSA-BLK
Yellow.	WDSC-13S-TSA-YEL	WDSC-25S-TSA-YEL	-