


Car Park Fixtures Wheel Stops - Concrete

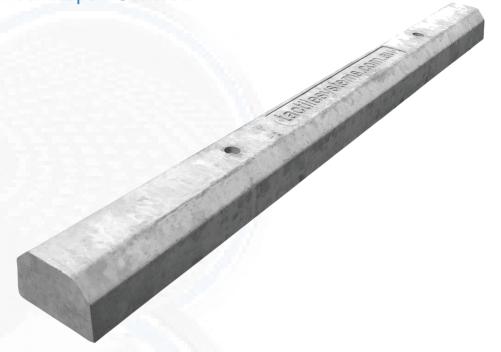

Tactile Systems Australia concrete wheel stops are ideal for protecting people and property from damage by vehicles.

They are manufactured from 40mpa concrete with two steel reinforcing bars for added strength and durability.

Two cast in mounting holes for each wheel stop helps provide secure fixing and install.

Installation is by two 10mm x 150mm concrete screws or by 250mm spikes for bitumen surfaces, available separately.

Designed to comply with AS/NZ 2890.1:2004





SPECIFICATIONS		
Material	Weight	Code
Concrete	55kg	CWS-C-1650-GFR



