

Warning Discrete TGSi

QR Design Polyurethane



COLOUR VARIATIONS



Tactile Systems Australia Warning Discrete TGSi Polyurethane range are the ideal cost effective product for a wide range of applications. Available in a range of colours, they feature a P5 slip resistance rating – as tested by a NATA Approved Laboratory.

Manufactured from UV stabilised Thermoplastic Polyurethane Elastomer, which was specifically chosen to withstand the harsh Australian weather conditions and built environment.

TSA's range of Polyurethane TGSi have been used in a huge variety of applications such as train stations, office buildings, airports, bus stops and shopping centres.


Specifically designed 26mm stem to suit bitumen install. Stem design gives superior holding resistance as well as ensuring long install service.

SPECIFICATIONS

Black	WDPL-26S-TSA-BLK
Yellow	WDPL-26S-TSA-YEL

SUITABLE SUBSTRATES

Tiles	Carpet	Bitumen
Timber	Rubber	Concrete
Vinyl	Pavers	Exp Aggregate

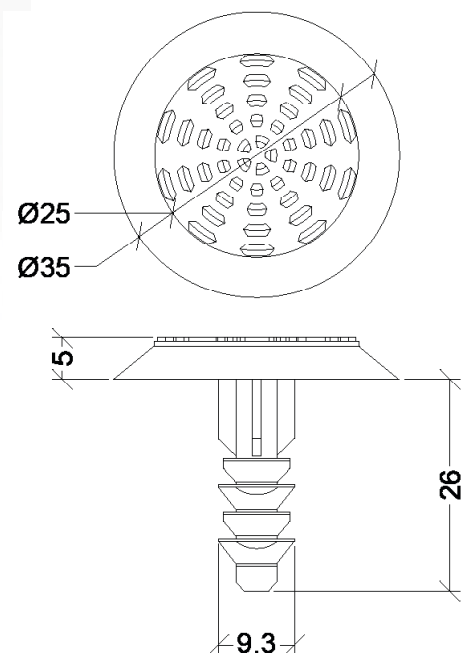

AS/NZ 1428.4.1 2009
STANDARD



P5 SLIP RATING NATA
APPROVED LAB



10 YEAR PRODUCT
WARRANTY



INSTALLATION SERVICE
AVAILABLE



REQUIRES 45%
LUMINANCE CONTRAST