



Surface Mount Stair Nosing

Classic Series 2 - Cataphoresis Brass Alloy

Surface Mount
Stair Nosing

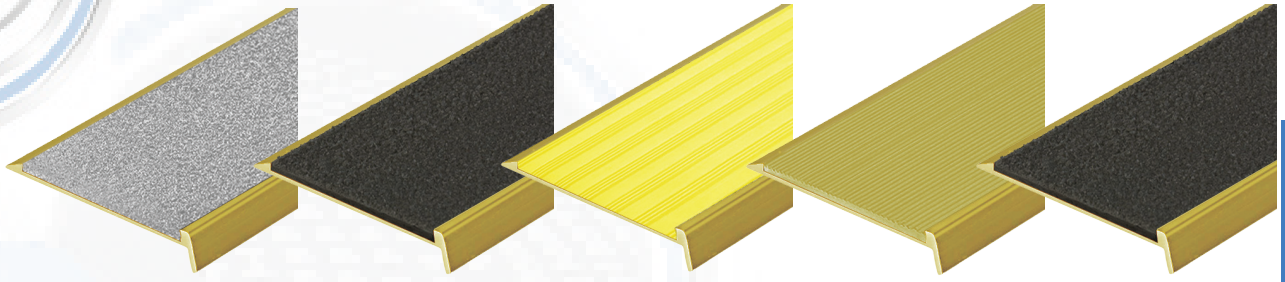

P5 TAPE




P5 SAFEGUARD



P5 POLY



ALUMINIUM INSERT



P5 CARB



AS/NZ 1428.1 2021
STANDARD



P5 SLIP RATING NATA
APPROVED LAB



2 YEAR PRODUCT
WARRANTY



STD LENGTH 3.65 L/M
CUT & INSTALL AVAILABLE



REQUIRES 30%
LUMINANCE CONTRAST
Testing Service Available

Surface Mount Classic Series 2 - Cataphoresis Brass Alloy

Colour	P5 Tape Insert	P5 Safeguard Insert	Colour	P5 Poly Insert	Carb Insert
Black	CS2-75X10-C-TI-BLK	CS2-75X10-C-SI-BLK	Black	CS2-75X10-C-PI-BLK	CS2-75X10-C-CI-BLK
Grey	CS2-75X10-C-TI-GRY	CS2-75X10-C-SI-GRY	Grey	CS2-75X10-C-PI-GRY	
Yellow	CS2-75X10-C-TI-YEL	CS2-75X10-C-SI-YEL	Yellow	CS2-75X10-C-PI-YEL	CS2-75X10-C-CI-YEL
White	CS2-75X10-C-TI-WHI	CS2-75X10-C-SI-WHI	Black / Lumo		CS2-75X10-C-CI-B/L
Lumo	CS2-75X10-C-TI-LUM				
Colour	Aluminium Insert				
Black	CS2-75X10-C-AI-BLK				
Clear	CS2-75X10-C-AI-CLR				
CatBrass	CS2-75X10-C-AI-CBR				

Tactile Systems Australia Classic Series 2 range of Cataphoresis Brass Alloy stair nosing is the ideal product for a wide range of applications.

Designed to comply with AS-1428.1 2021 it features a long lasting aluminium construction paired with a choice of inserts – Aluminium Oxide tape insert, PVC Poly Insert and Fibre-Reinforced Infill, or Aluminium insert. – all with P5 slip rating. Inserts are available in a range of colours to meet luminance contrast requirements, as well as giving a range of design options.

Suitable for indoor or outdoor applications, Classic Series stair nosing has been on some of Australia's most iconic construction projects.

