


# Surface Mount Stair Nosing Classic Series 2 - Clear Anodised



**P5 TAPE**

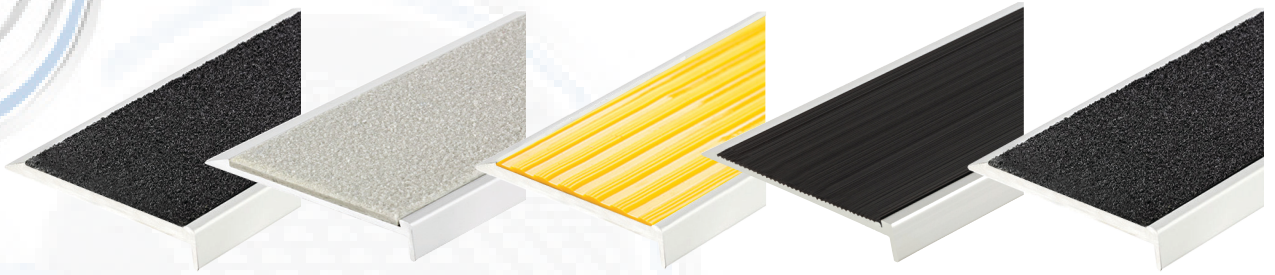


**P5 SAFEGUARD**



**P5 POLY**



**ALUMINIUM INSERT**

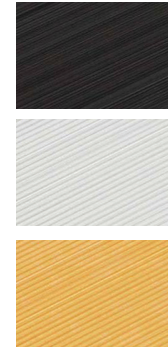

**P5 CARB**



AS/NZ 1428.1 2021  
STANDARD



P5 SLIP RATING NATA  
APPROVED LAB



2 YEAR PRODUCT  
WARRANTY



STD LENGTH 3.65 L/M  
CUT & INSTALL AVAILABLE



REQUIRES 30%  
LUMINANCE CONTRAST  
Testing Service Available

## Surface Mount Classic Series 2 - Clear Alloy

Colour	P5 Tape Insert	P5 Safeguard Insert
Black	CS2-75X10-TI-BLK	CS2-75X10-SI-BLK
Grey	CS2-75X10-TI-GRY	CS2-75X10-SI-GRY
Yellow	CS2-75X10-TI-YEL	CS2-75X10-SI-YEL
White	CS2-75X10-TI-WHI	CS2-75X10-SI-WHI
Lumo	CS2-75X10-TI-LUM	
Colour	Aluminium Insert	
Black	CS2-75X10-AI-BLK	
Clear	CS2-75X10-AI-CLR	
CatBrass	CS2-75X10-AI-CBR	

Colour	P5 Poly Insert	Carb Insert
Black	CS2-75X10-PI-BLK	CS2-75X10-CI-BLK
Grey	CS2-75X10-PI-GRY	
Yellow	CS2-75X10-PI-YEL	CS2-75X10-CI-YEL
Black / Lumo		CS2-75X10-CI-B/L

**Tactile Systems Australia** Classic Series 2 range of clear anodised stair nosing is the ideal product for a wide range of applications.

Designed to comply with AS-1428.1 2021 it features a long lasting aluminium construction paired with a choice of inserts – Aluminium Oxide tape insert, PVC Poly Insert and Fibre-Reinforced Infill, or Aluminium insert. – all with P5 slip rating. Inserts are available in a range of colours to meet luminance contrast requirements, as well as giving a range of design options.

Suitable for indoor or outdoor applications, Classic Series stair nosing has been on some of Australia's most iconic construction projects.

