



Surface Mount Stair Nosing Classic Series 3 - Clear Anodised

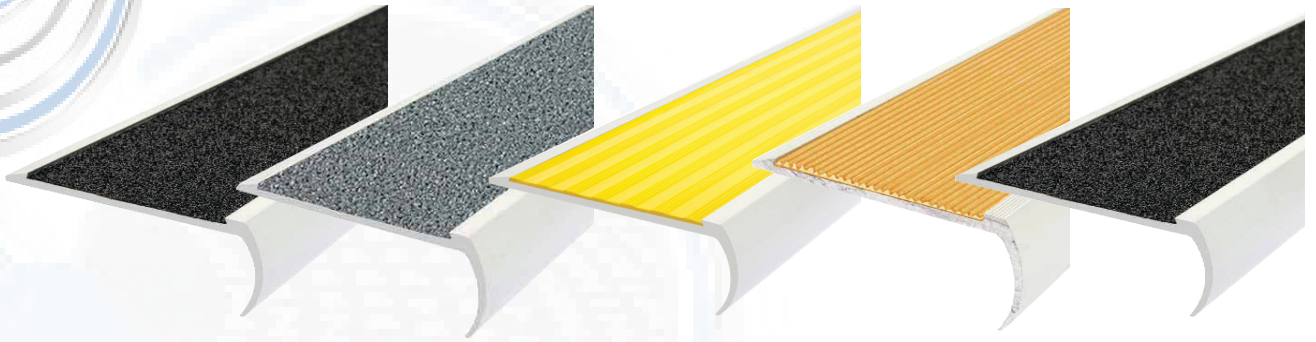

P5 TAPE

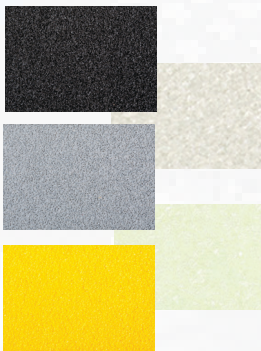

P5 SAFEGUARD



P5 POLY



ALUMINIUM INSERT



P5 CARB



AS/NZ 1428.1 2021
STANDARD



P5 SLIP RATING NATA
APPROVED LAB



2 YEAR PRODUCT
WARRANTY



STD LENGTH 3.65 L/M
CUT & INSTALL AVAILABLE



REQUIRES 30%
LUMINANCE CONTRAST
Testing Service Available

Surface Mount Classic Series 3 - Clear Alloy

Colour	P5 Tape Insert	P5 Fibre Insert
Black	CS3-75X30-TI-BLK	CS3-75X30-SI-BLK
Grey	CS3-75X30-TI-GRY	CS3-75X30-FI-GRY
Yellow	CS3-75X30-TI-YEL	CS3-75X30-FI-YEL
White	CS3-75X30-TI-WHI	CS3-75X30-FI-WHI
Lumo	CS3-75X30-TI-LUM	
Colour	Aluminium Insert	
Black	CS3-75X30-AI-BLK	
Clear	CS3-75X30-AI-CLR	
CatBrass	CS3-75X30-AI-CBR	

Colour	P5 Poly Insert	Carb Insert
Black	CS3-75X30-PI-BLK	CS3-75X30-CI-BLK
Grey	CS3-75X30-PI-GRY	
Yellow	CS3-75X30-PI-YEL	CS3-75X30-CI-YEL
Black / Lumo		CS3-75X30-CI-B/L

Tactile Systems Australia Classic Series 3 range of clear anodised stair nosing is the ideal product for a wide range of applications.

Designed to comply with AS-1428.1 2021 it features a long lasting aluminium construction, paired with a choice of inserts – Aluminium Oxide tape insert or PVC – both with P5 slip rating. Both inserts are available in a range of colours to meet luminance contrast requirements, as well as giving a range of design options.

Suitable for indoor or outdoor applications, Classic Series stair nosing has been on some of Australia's most iconic construction projects.

