


# Surface Mount Stair Nosing

## Select Series 1 - Brass, Black, Cataphoresis

Surface Mount

Stair Nosing

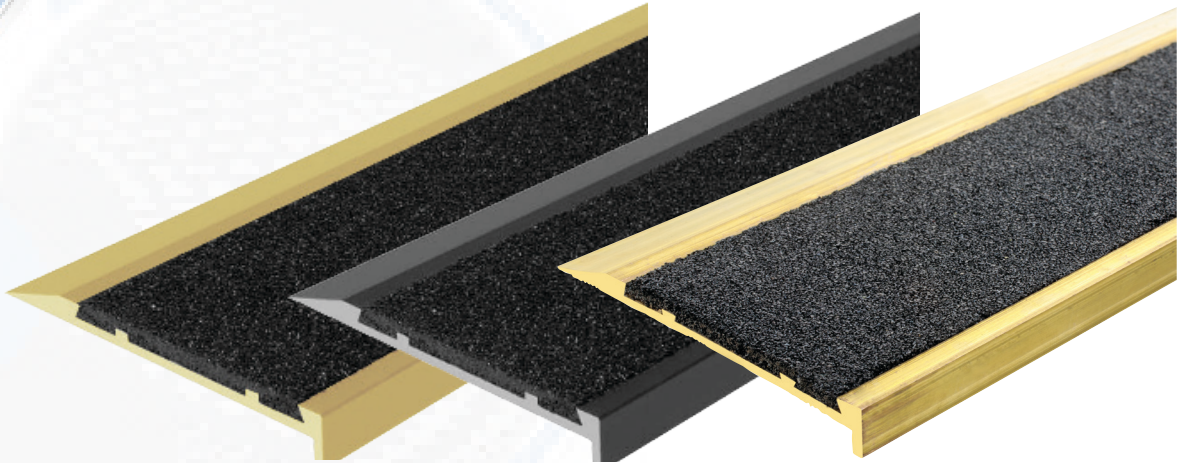

AS/NZ 1428.1 2021  
STANDARD



P5 SLIP RATING NATA  
APPROVED LAB



2 YEAR PRODUCT  
WARRANTY



STD LENGTH 3.65 L/M  
CUT & INSTALL AVAILABLE



REQUIRES 30%  
LUMINANCE CONTRAST

### CARBORUNDUM COLOUR VARIATIONS



**Tactile Systems Australia** Select Series 1 Surface Mount stair nosing features Brass, Black anodised aluminium or Cataphoresis Brass Look matched with a high-grade carborundum insert.

Designed to comply with AS-1428.1 2021, it features high grade aluminium construction with a carborundum insert. A P5 slip rating from a NATA approved laboratory, tested to AS 4586

This type of Select Series nosing is surface mounted, suitable for indoor or outdoor applications. It can be used for new construction, as well as retrofit requirements.

### Surface Mount **Select Series 1**

Colour	Brass Alloy	Black Alloy	Cataphoresis
Black Carb Infill	SC1-75X10-BR-BLK	SC1-75X10-B-BLK	SC1-75X10-C-BLK

