


# Car Park Fixtures

## Wheel Stops - Concrete

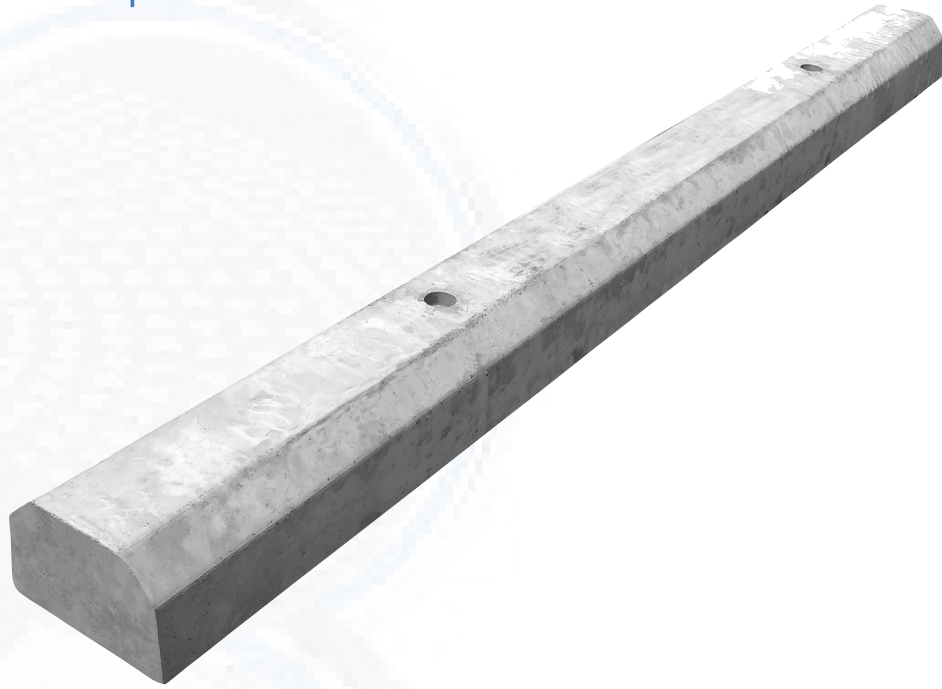

**Tactile Systems Australia** concrete wheel stops are ideal for protecting people and property from damage by vehicles.

They are manufactured from 40mpa concrete with two FRP reinforcing bars for added strength and durability. FRP reo has a higher tensile strength than steel reo.

Two cast in mounting holes for each wheel stop helps provide secure fixing and install.

Installation is by two 10mm x 150mm concrete screws or by 250mm spikes for bitumen surfaces, available separately.

Designed to comply with AS/NZ 2890.1:2004



AS/NZ 2890.1: 2004  
STANDARD



2 YEAR PRODUCT  
WARRANTY



INSTALLATION SERVICE  
AVAILABLE

### SPECIFICATIONS

Material	Weight	Code
Concrete	55kg	CWS-C-1650-GFR

