


Surface Mount Stair Nosing

Classic Series 4 - Cataphoresis Brass Alloy

Surface Mount

Stair Nosing

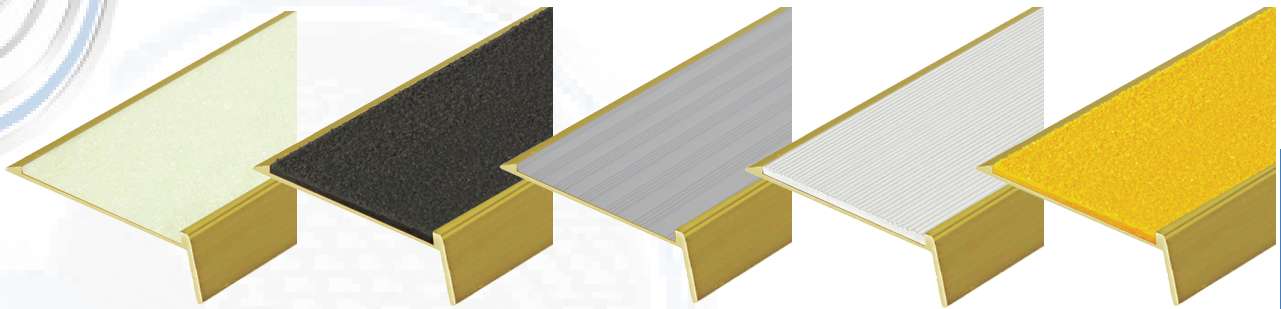


P5 TAPE




P5 SAFEGUARD



P5 POLY

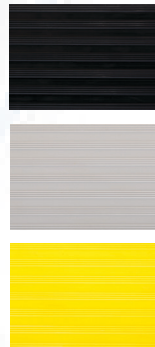

ALUMINIUM INSERT

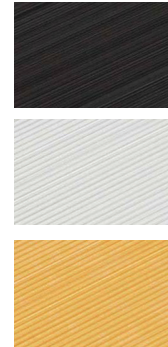

P5 CARB



AS/NZ 1428.1 2021
STANDARD



P5 SLIP RATING NATA
APPROVED LAB



2 YEAR PRODUCT
WARRANTY



STD LENGTH 3.65 L/M
CUT & INSTALL AVAILABLE



REQUIRES 30%
LUMINANCE CONTRAST
Testing Service Available

Surface Mount Classic Series 4 - Cataphoresis Brass Alloy

Colour	P5 Tape Insert	P5 Safeguard Insert
Black	CS4-75X30-C-TI-BLK	CS4-75X30-C-SI-BLK
Grey	CS4-75X30-C-TI-GRY	CS4-75X30-C-SI-GRY
Yellow	CS4-75X30-C-TI-YEL	CS4-75X30-C-SI-YEL
White	CS4-75X30-C-TI-WHI	CS4-75X30-C-SI-WHI
Lumo	CS4-75X30-C-TI-LUM	
Colour	Aluminium Insert	
Black	CS4-75X30-C-AI-BLK	
Clear	CS4-75X30-C-AI-CLR	
CatBrass	CS4-75X30-C-AI-CBR	

Colour	P5 Poly Insert	Carb Insert
Black	CS4-75X30-C-PI-BLK	CS4-75X30-C-CI-BLK
Grey	CS4-75X30-C-PI-GRY	
Yellow	CS4-75X30-C-PI-YEL	CS4-75X30-C-CI-YEL
Black / Lumo		CS4-75X30-C-CI-B/L

Tactile Systems Australia Classic Series 4 range of Cataphoresis Brass Alloy stair nosing is the ideal product for a wide range of applications.

Designed to comply with AS-1428.1 2021 it features a long lasting aluminium construction paired with a choice of inserts – Aluminium Oxide tape insert, PVC Poly Insert and Fibre-Reinforced Infill, or Aluminium insert. – all with P5 slip rating. Inserts are available in a range of colours to meet luminance contrast requirements, as well as giving a range of design options.

Suitable for indoor or outdoor applications, Classic Series stair nosing has been on some of Australia's most iconic construction projects.

