



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



2 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Directional Discrete TGSi

Bladed Shaft Polyurethane



Design:

Bladed shaft engineered for efficient tactile installation.




Slip Resistance:

Achieves a P5 rating, ensuring optimal safety.



Installation:

Streamlined saw-cut method facilitates quick installation over extensive areas.

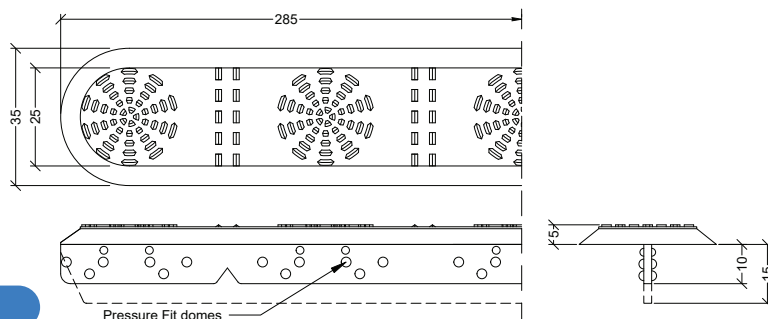

SPECIFICATIONS:

COLOUR

10MM BLADE

Beige	DDPL-10B-TSA-BEI
Black	DDPL-10B-TSA-BLK
Blue	DDPL-10B-TSA-BLU
Charcoal	DDPL-10B-TSA-CHA
Grey	DDPL-10B-TSA-GRY
Terracotta	DDPL-10B-TSA-TER
White	DDPL-10B-TSA-WHI
Yellow	DDPL-10B-TSA-YEL

COLOUR

15MM BLADE

Black	DDPL-15B-TSA-BLK
Yellow	DDPL-15B-TSA-YEL

VARIATIONS

COLOURS

