



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



5 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Directional Discrete TGSi

Single Stem Polyurethane



Design:

Smooth sides & top surface designed for P5 slip rating.



Suitable Substrates

Suitable for tiles, timber, vinyl, concrete, rubber,
pavers & bitumen




Installation:

Adaptable to masonry or core drilling with pressure
fitting.



Material:

UV Stabilised Premium polyether-based TPU (thermoplastic
polyurethane)

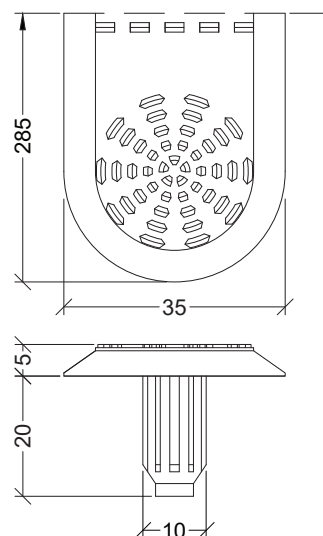

SPECIFICATIONS:

COLOUR

20MM STEM

Beige	DDPL-20S-TSA-BEI
Black	DDPL-20S-TSA-BLK
Blue	DDPL-20S-TSA-BLU
Charcoal	DDPL-20S-TSA-CHA
Grey	DDPL-20S-TSA-GRY
Terracotta	DDPL-20S-TSA-TER
White	DDPL-20S-TSA-WHI
Yellow	DDPL-20S-TSA-YEL

VARIATIONS

COLOURS

