



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



2 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Warning Discrete TGSi

Bladed Shaft Polyurethane



Design:

Warning indicator studs joined on a single bladed shaft, giving fixed spacing and fast, straight-line installation.



Material:

UV Stabilised Premium polyether-based TPU (thermoplastic polyurethane)




Installation:

Saw cut a 2.5mm groove to the blade depth and pressure fit the blade. The wedges along the blade lock it in place. Available with a 10mm or 15mm blade.



Suitable Substrates

Concrete, pavers, tiles and bitumen

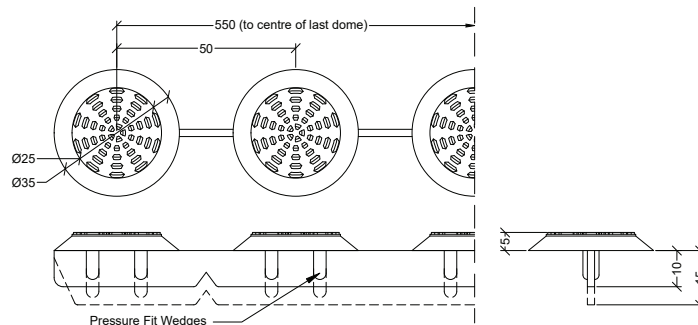

SPECIFICATIONS:

COLOUR

10MM BLADE

Beige	WDPL-10B-TSA-BEI
Black	WDPL-10B-TSA-BLK
Blue	WDPL-10B-TSA-BLU
Charcoal	WDPL-10B-TSA-CHA
Grey	WDPL-10B-TSA-GRY
Terracotta	WDPL-10B-TSA-TER
White	WDPL-10B-TSA-WHI
Yellow	WDPL-10B-TSA-YEL

COLOUR

15MM BLADE

Black	WDPL-15B-TSA-BLK
Yellow	WDPL-15B-TSA-YEL

VARIATIONS

COLOURS

