



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



2 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Warning Discrete TGSi

Bladed Shaft Polyurethane



Design:

Bladed shaft engineered for efficient tactile installation.




Slip Resistance:

Achieves a P5 rating, ensuring optimal safety.



Installation:

Streamlined saw-cut method facilitates quick installation over extensive areas.

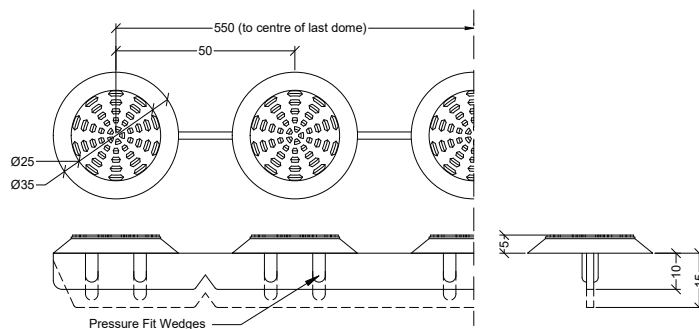

SPECIFICATIONS:

COLOUR 10MM BLADE

Beige WDPL-10B-TSA-BEI

Black WDPL-10B-TSA-BLK

Blue WDPL-10B-TSA-BLU

Charcoal WDPL-10B-TSA-CHA

Grey WDPL-10B-TSA-GRY

Terracotta WDPL-10B-TSA-TER

White WDPL-10B-TSA-WHI

Yellow WDPL-10B-TSA-YEL

COLOUR 15MM BLADE

Black WDPL-15B-TSA-BLK

Yellow WDPL-15B-TSA-YEL

VARIATIONS

COLOURS

