



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



5 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Warning Discrete TGSi

Polyurethane Ring Type



Design:

Smooth sides & 10 Ring top surface designed for P5 slip rating.



Material:

UV Stabilised Premium polyether-based TPU (thermoplastic polyurethane)




Installation:

Drill 8mm holes using the TSA template, then press fit the 20mm stem.



Suitable Substrates

Tiles, timber, vinyl, concrete, rubber, pavers, Carpet and bitumen

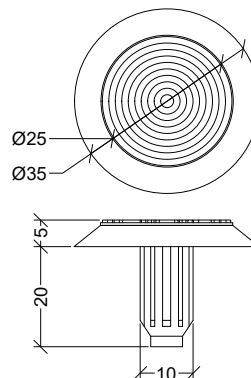

SPECIFICATIONS:

COLOUR

20MM STEM

Black

WDPL-20S-10R-TSA-BLK

Yellow

WDPL-20S-10R-TSA-BLK

VARIATIONS

COLOURS

