



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



5 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Warning Discrete TGSi

10 Ring Polyurethane



Design:

Smooth sides & 10 Ring top surface designed for P5 slip rating.



Suitable Substrates

Suitable for tiles, timber, vinyl, concrete, rubber,
pavers & bitumen




Installation:

Adaptable to masonry or core drilling with pressure
fitting.



Material:

UV Stabilised Premium polyether-based TPU (thermoplastic
polyurethane)

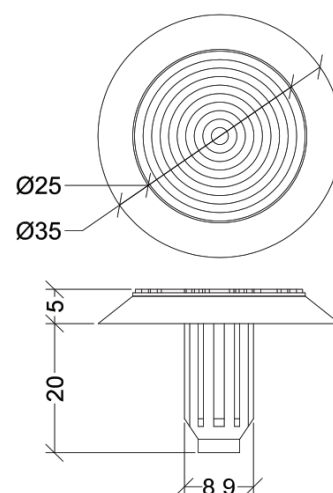

SPECIFICATIONS:

COLOUR

20MM STEM

Black

WDPL-20S-10R-TSA-BLK

Yellow

WDPL-20S-10R-TSA-BLK

VARIATIONS

COLOURS

