



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



5 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Warning Discrete TGSi

Single Stem Polyurethane



Design:

Smooth sides and a radial slotted top surface for slip resistance.



Material:

UV Stabilised Premium polyether-based TPU (thermoplastic polyurethane)




Installation:

Drill 8mm holes using the TSA template, then press fit the 20mm stem.



Suitable Substrates

Tiles, timber, vinyl, concrete, rubber, pavers, Carpet and bitumen

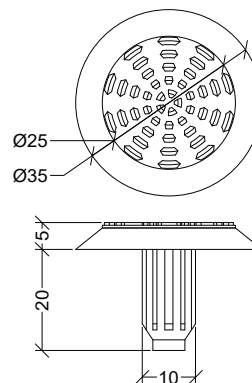

SPECIFICATIONS:

COLOUR

20MM STEM

Beige	WDPL-20S-TSA-BEI
Black	WDPL-20S-TSA-BLK
Blue	WDPL-20S-TSA-BLU
Charcoal	WDPL-20S-TSA-CHA
Grey	WDPL-20S-TSA-GRY
Terracotta	WDPL-20S-TSA-TER
White	WDPL-20S-TSA-WHI
Yellow	WDPL-20S-TSA-YEL

VARIATIONS

COLOURS

