



AS/NZ 1428.4.1 2009
Standard



P5 Slip Rating NATA
Approved Lab



10 Year Product
Warranty



Installation
Service Available



Requires 45%
Luminance Contrast

Warning Discrete TGSi

Stainless Steel



Design:

Truncated dome warning indicator with a concentric ring top for slip resistance.



Material:

316 marine grade stainless steel.
Black finish: PVD coat over 316 stainless








Installation:

13mm or 25mm glue-in stem, pressure fit plug, screw fit, or flat base surface mount



Suitable Substrates

Tiles, timber, vinyl, concrete, rubber, pavers and bitumen

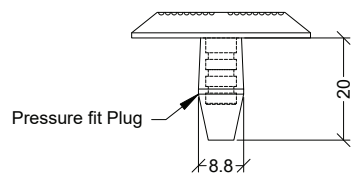

SPECIFICATIONS:

FLAT BASE

Silver	WDSS-FB-TSA-SS
Black	WDSS-FB-TSA-BLK

13MM STEM

Silver	WDSS-13S-TSA-SS
Black	WDSS-13S-TSA-BLK

25MM STEM

Silver	WDSS-25S-TSA-SS
Black	WDSS-25S-TSA-BLK

PRESSURE FIT

Silver	WDSS-20P-TSA-SS
Black	WDSS-20P-TSA-BLK

SCREW FIT

Silver	WDSS-SF-TSA-SS
Black	WDSS-SF-TSA-BLK

VARIATIONS:

COLOURS

