Tactile Systems

AS/NZS 1428.4.1 2009 Standard

P5 Slip Rating NATA Approved Lab

5 Year Product Warranty

Installation Service Available

Requires 30% Luminance Contrast

Warning Integrated TGSI

Future-Tech ASA



Design:

Integrated warning TGSI panel with raised truncated cones that alert people with low vision to hazards ahead. Bevelled edges, pre-formed fixing points, and flexes slightly to follow minor surface variations.

Material:


Glass reinforced ASA (acrylonitrile styrene acrylate), a weather and UV resistant engineering plastic.


Installation:

Bond with TSA MS-2000 construction adhesive and fix with eight stainless steel hammer fixings (supplied). For timber, use stainless steel timber screws instead. When install outdoors leave a 1mm gap between panels to allow for expansion.

Versatility:

Ideal for retrofitting existing surfaces as well as new builds. Substrates include Concrete (broomed and exposed aggregate), pavers, tiles, bitumen and timber

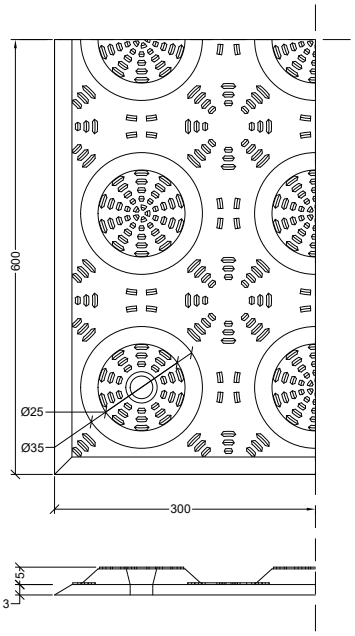



SPECIFICATIONS:

COLOUR	300MM X 600MM
Black	WIFT-30X60-TSA-BLK
White	WIFT-30X60-TSA-WHI
Yellow	WIFT-30X60-TSA-YEL
Terracotta	WIFT-30X60-TSA-TER

VARIATIONS

COLOURS

