




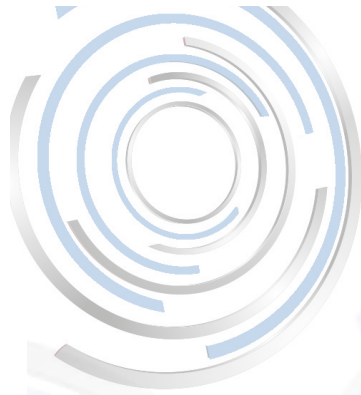

Directional Integrated TGSI Ceramic Tile - 10mm

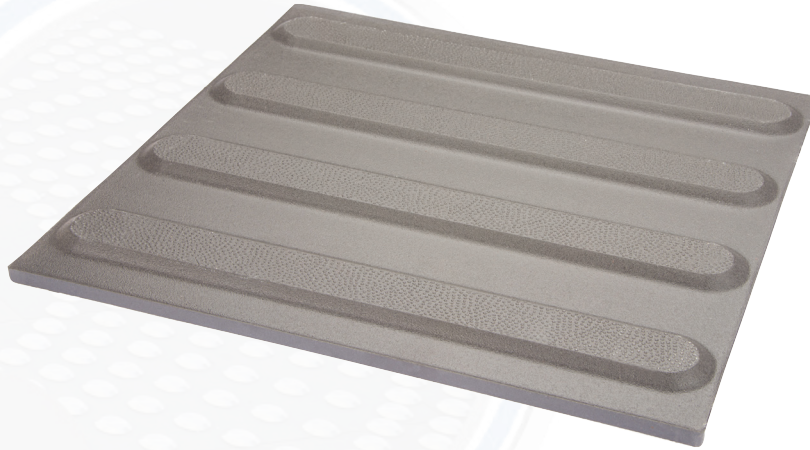

COLOUR VARIATIONS

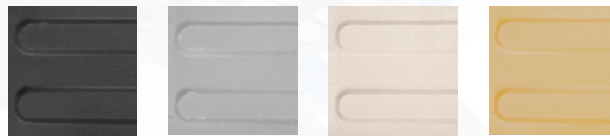

Ceramic

Directional Integrated TGSI



AS/NZ 1428.4.1 2009
STANDARD



P5 SLIP RATING NATA
APPROVED LAB



5 YEAR PRODUCT
WARRANTY



REQUIRES 30%
LUMINANCE CONTRAST
Testing Service Available

SPECIFICATIONS 10mm - 11 per box

Black	DICE-30X30-TSA-BLK
Charcoal	DICE-30X30-TSA-CHA
Ivory	DICE-30X30-TSA-IVO
Yellow	DICE-30X30-TSA-YEL

SUMMARY OF TESTS PERFORMED

WATER ABSORPTION - AS 4459.4

Average water absorption	0.19%
Apparent porosity	0.43%
Apparent relative density	2.29

Bulk density	2.28 g/cm ³
--------------	------------------------

FLEXURAL STRENGTH - AS 4459.4

Breaking Load (N)	2242
Breaking Strength (N)	2092
Modulus of rupture (N/mm ²)	31.39

