

E-PLUS

PURE EPOXY RESIN

**30 YEARS
OF EXPERIENCE**
in the epoxy bonded
anchor production

E-PLUS

PURE EPOXY RESIN



Tactile Systems
2/46 Blanck Street,
Ormeau, QLD 4208

Tel. +61 07 5580 6993
Fax +61 1300 808 946
www.tactilesystems.com.au
sales@tactilesystems.com.au

EPOXY SEISMIC QUALIFIED AND GREEN

Pure epoxy bi-component chemical anchor styrene free



ETA qualified for fixing in concrete.
Increased performance.



Service Life of 100 years.
Ideal for important structure.



C2 seismic from M12 to M24. Ideal
for high seismicity values.



Rebar seismic from $\varnothing 12$ - $\varnothing 32$ mm.




Standard mixer. Easy to mix.



Qualified for flooded hole.



Qualified for dry and wet concrete.

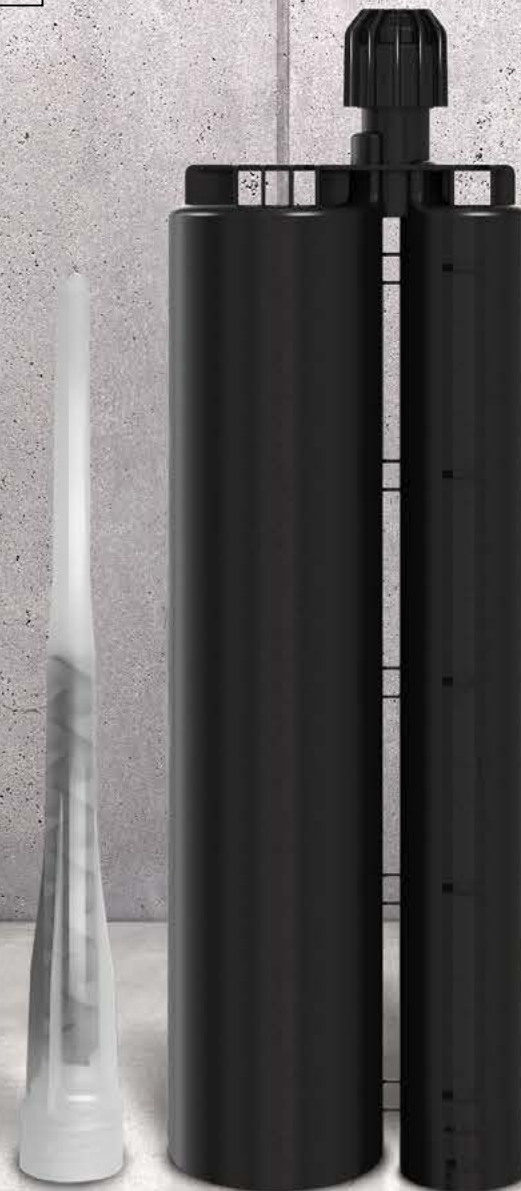

R240 fire resistance for rebar.




Low VOC emission and content.



Diamond drilling qualified for rebar
application up to 2500 mm.



Diamond drilling qualified for threaded
rod for option 1 and option 7.



No drip. Thixotropic.
Overhead installation qualified.



Reduced torquing time.



Max long service temperature qualified.



Available design software.

