Tactile Systems

AS/NZS 1428.4.1 2009 Standard

P5 Slip Rating NATA Approved Lab


5 Year Product Warranty

Installation Service Available

Requires 30% Luminance Contrast

Warning Integrated TGSI

Future-Tech FRP

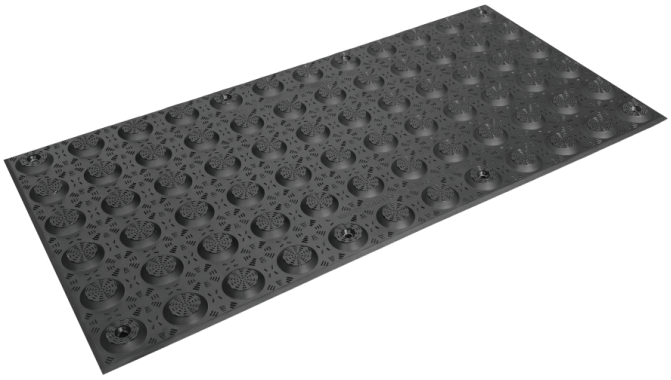

Design:

Integrated warning TGSI panel with raised truncated cones that alert people with low vision to hazards ahead. Bevelled edges and pre-formed countersunk fixing points.

Material:


Glass fibre reinforced SMC (sheet moulding compound), a high strength composite with low shrinkage and excellent dimensional stability.

Installation:

Bond with TSA MS-2000 construction adhesive and fix with M6 x 50mm 316 stainless steel Torx drive concrete screws through the pre-formed fixing points. For timber, use stainless steel timber screws instead.

Versatility:

Ideal for retrofitting existing surfaces as well as new builds. Substrates include Concrete (broomed and exposed aggregate), pavers, tiles, bitumen and timber

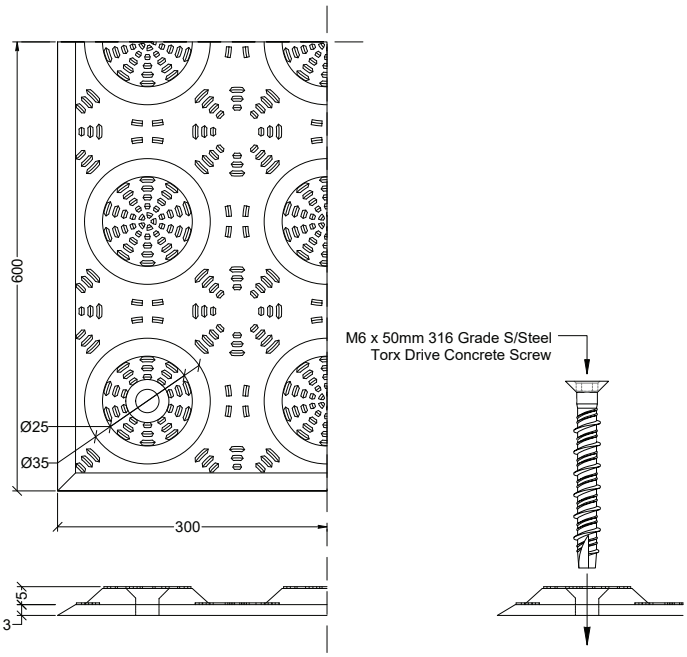


SPECIFICATIONS:

COLOUR	300MM X 600MM
Black	WIFT-30X60-FRP-BLK
White	WIFT-30X60-FRP-WHI
Yellow	WIFT-30X60-FRP-YEL
Terracotta	WIFT-30X60-FRP-TER

VARIATIONS

COLOURS

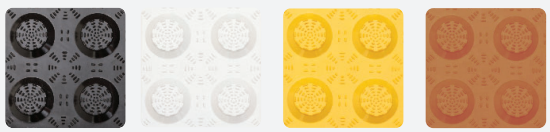

1300 808 946 • sales@tactilesystems.com.au • tactilesystems.com.au

QBCC Lic No. 1 270 287